

MODEL  
**2M285 Series**

**FEATURES**

- High reliability with entirely ceramic-metal sealing.
- High performance with specially designed refrigerator fin.
- Stable under wide range of load condition.
- High power output.


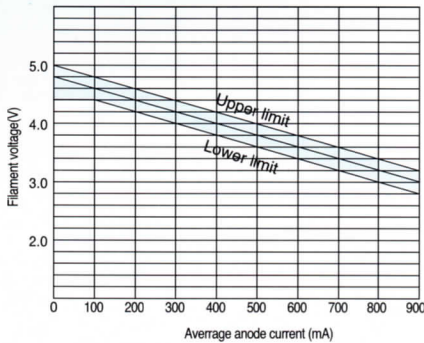


Fig.1 Filament Voltage Reduction Chart



**2M285-02TYPE**

**1. General Data**

**ELECTRICAL CHARACTERISTICS**

Filament voltage, Stand-by .....	4.6Vac
Filament voltage, Operation .....	3.1Vac
Filament Current .....	19.5Aac
Frequency(with matched load).....	2455MHz
Anode potential .....	Earth
Filament potential .....	(-5kV)
Magnet .....	Ferrite - magnet

**MECHANICAL CHARACTERISTICS**

Width .....	120mm(4.72inches) max.
Length .....	128mm(5.04inches) max.
Height .....	192.5mm(7.58inches) max.
Weigh .....	Approx. 3.0Kg
Mounting position .....	Any
Cooling .....	Forced air

**2. Absolute Maximum Ratings**

**ELECTRICAL CHARACTERISTICS**

	Min	Max	Unit
Filament Voltage, Stand-by .....	4.40	5.00	V
Filament voltage, Operation .....	(See Fig.1)		V
Pre - heating Time .....	8	-	Sec
Average Anode Current .....	-	900	mAdc
Peak anode current .....	-	2100	mAp
Average anode input .....	-	5000	W
Load VSWR(continuous) .....	-	4	-
Anode core temperature .....	-	180	°C
Storage temperature .....	-30	60	°C

**3. Typical Operation**

**OPERATING CONDITIONS**

Filament voltage, Stand-by .....	4.6Vac
Filament voltage, Operation .....	3.1Vac
Average anode current # .....	840mAdc
Cooling air flow .....	2.0m <sup>3</sup> /min
# Power supply unit:Half-wave doubler with leakage transformer or full-wave rectifier without filter.	

**TYPICAL PERFORMANCE**

Frequency(matched load) .....	2455MHz
Peak anode voltage .....	5.10kVp
Average output power(matched load)	3000W